

WMT 300/2

- 240mm traverse on cross slide/milling table
- Rack and pinion saddle feed
- Amazing value - especially with all our standard accessories
- Compact and versatile
- Robust construction
- Generous capacity
- Ideally suited to model engineering, machine shop, vehicle restoration and general engineering
- Large diameter spindle supported on taper roller bearings
- Supplied with two drawbars 12mm and ³/₈" Whit

We include as standard and at no extra charge:


- 130mm 3 Jaw chuck with inside/outside jaws
- Faceplate 200mm tee slotted
- 13mm drill chuck
- Dead centres (2)
- Face cutter 3MT with replaceable tips
- Fixed steady
- Travelling steady
- Set TCT pre-ground cutting tools
- Drill vice
- Imperial/metric threadcutting
- Thread dial indicator

Standard accessories included at no extra cost



This equipment enables you to use your machine immediately without additional cost for accessories charged at extras by other suppliers.

- Guards removed for clarity
- Max. tool size 12mm

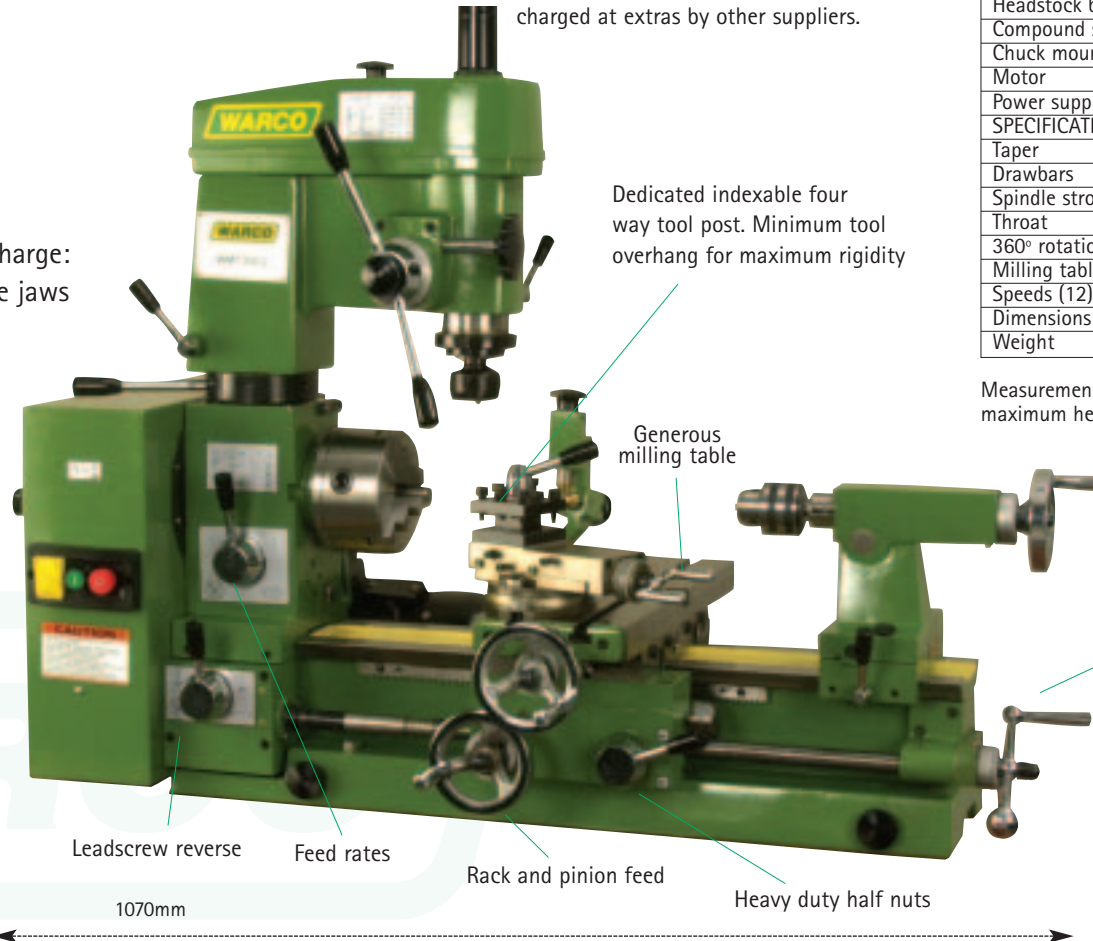

Item No. 3090

ITEM NO. 3090	WMT300/2 Combined Lathe/Milling Machine
SPECIFICATION - LATHE	
Centre height	150mm
Maximum swing	300mm
Swing over cross slide	160mm
Distance between centres	500mm
Bed width	136mm
Longitudinal travel	400mm
Spindle taper	4MT
Spindle bore	26mm
Range of spindle speeds (6) rpm	160-1600
Range of metric threads	0.5-3mm
Range of imperial threads	6-30tpi
Tailstock taper	3MT
Tailstock quill travel	35mm
Top slide travel	82mm
Cross slide travel	170mm
Headstock bearings	Taper roller
Compound slide swivel	360°
Chuck mounting	Flange fitting
Motor	550w
Power supply	240v
SPECIFICATION - MILLING MACHINE	
Taper	3MT
Drawbars	3/8" Whit. 12mm
Spindle stroke	92mm
Throat	171mm
360° rotation	360°
Milling table	430 x 150mm
Speeds (12)	125-1600rpm
Dimensions L x W x H	1070 x 580 x 870mm
Weight	165kg

Measurements taken to end of handle grips and head elevated to maximum height