


# ZX-15 Milling Machine

- Versatile mill
- Robust construction
- Wide cross slide for maximum support
- Tilting head - worm gear mechanism
- Rack and pinion quill feed for drilling operation
- Fine feed to quill for precise milling and boring
- Available with metric or imperial leadscrews
- Supplied with 13mm drill chuck
- Forward and reverse switch
- Drawbar thread 3/8" Whit.

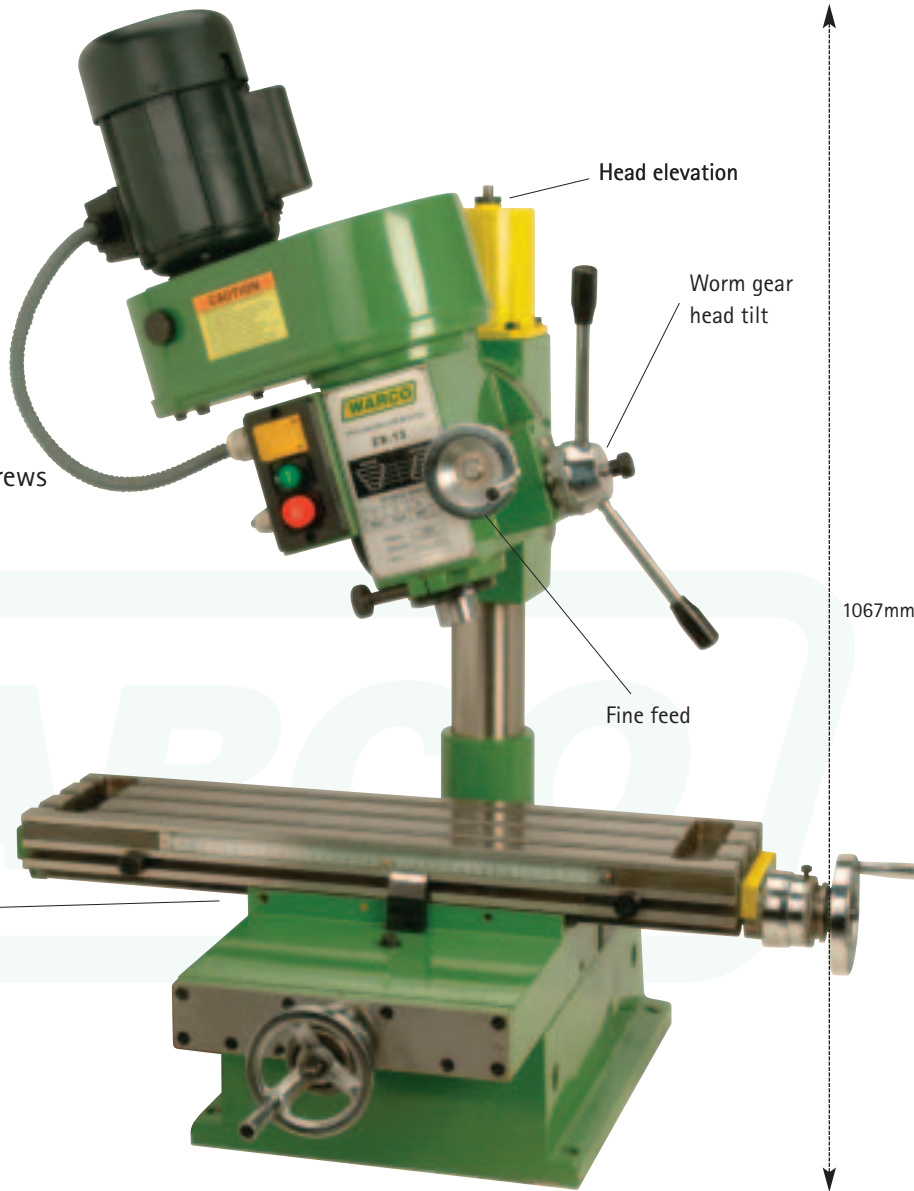

ITEM NO. 3050/3051	ZX15 milling machine
SPECIFICATION	
Maximum drilling capacity	16mm
Maximum end milling capacity	20mm
Table size	630 x 150mm
Tee slot dimensions	
Slot width	12mm
Tee width	20mm
Tee height	9.5mm
No. of tee slots	3
Cross traverse	145mm
Longitudinal traverse	350mm
Vertical traverse	125mm
Distance spindle to table	400mm
Throat	162mm
Spindle taper	3MT
Spindle stroke	85mm
Number of speeds	4
Speed range rpm	400-1640
Head tilt left and right	90°-0-90°
Motor	550w
Power supply	240v
Dimensions W x D x H	775 x 559 x 1067mm
Weight	135kg

Measurements taken to end of handle grips and with head at maximum elevation

Extra wide cross slide for maximum rigidity

Item No. 3051 Imperial

Item No. 3050 Metric

ITEM NO. 3051A DIMENSIONS STAND	
Width	356mm
Depth	406mm
Height	787mm

Stand with tray Item No. 3051A

ITEM NO. 3051B DIMENSIONS TRAY	
Width	783mm
Depth	610mm

Swarf tray for bench mounting  
Item No. 3051B

Stand price includes delivery with machine. If stand is ordered separately please add £40 carriage.