


4VS Turret mill

A toolroom quality, high precision production mill

Standard features include:

- 2 axis digital readout
- Power feed to table X, Y and Z
- All purpose variable speed turret head with powered quill feed
- Unique design ensures spindle is firmly held by additional set of top bearings, essential for heavy duty milling
- Powerful 2hp motor
- Quality meehanite GC-275 castings
- Coolant system - capacity 10 litres
- Halogen low voltage lighting
- Centralised lubrication system to slideways and leadscrews ensures prolonged machine life
- Locks to X, Y, Z axes
- Tapered gibs to X, Y, Z axes
- High quality electrical system incorporating overload protection
- High quality low voltage electrical circuits

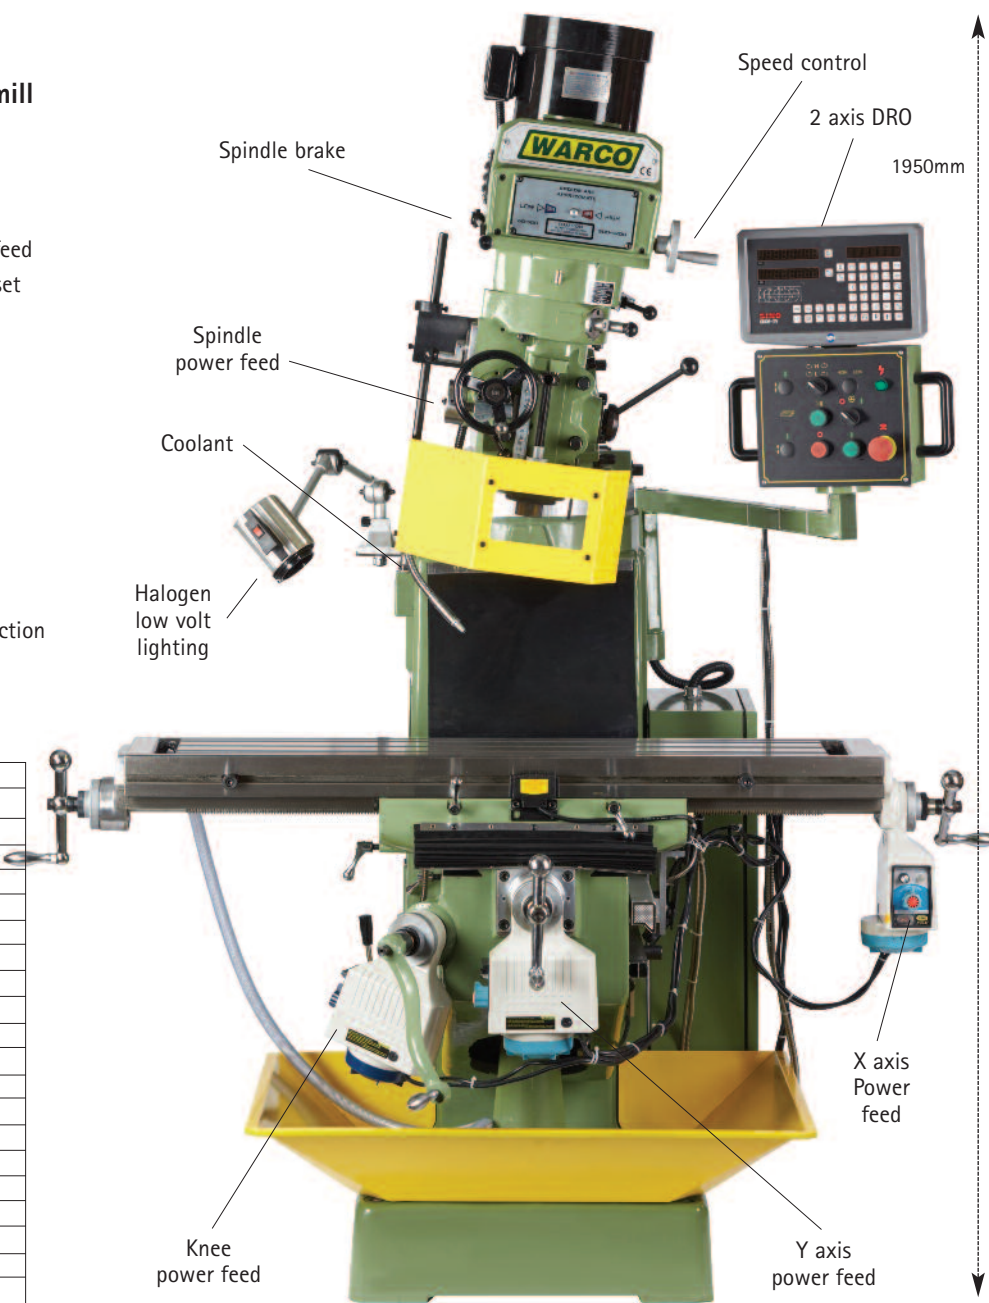

Air drawbar system

Item No. 4919

- Operator safety feature reduces risk associated with climbing to manually reach drawbar when changing tooling
- 3 second operation, save valuable operator time

ITEM NO. 3018	
SPECIFICATION	
Table size	230x1245mm
Number of tee slots	3
Cross traverse	306mm
Longitudinal traverse	730mm
Vertical traverse	406mm
Overarm rotation	360°
Distance spindle to table	470mm
Throat	228-553mm
Spindle taper	R8
Spindle stroke	127mm
Speed range rpm	50-3500
Number of speeds	Variable
Spindle feeds	0.04 - 0.08 - 0.14
Head tilt left/right	45° 0 45°
Head tilt front/back	45° 0 45°
Motor	1.5kw
Power supply	440v
Dimensions LxWxH to end of handle grips	1468x1650x1950mm
Weight	1000kg

